

KPC-S230 Range Colour Bullet Series



KPC-S230CB



KPC-S230CP1



KPC-S230CP3



KPC-S230CP4



KPC-S230CV




KPC-S230CWX

Image Device	SONY 1/3 INCH SUPER HAD CCD
Scanning System	2:1 Interlace
Scanning Frequency	NTSC - H : 15.734 (KHz), V : 59.94 (Hz) PAL - H : 15.635 (KHz), V : 50 (Hz)
Total Pixels	NTSC - 537(H) x 505(V) / PAL - 537(H) x 597(V)
Effective Pixels	NTSC - 510(H) x 492(V) / PAL - 500(H) x 582(V)
Horizontal Resolution	380 TV Lines
Electronic Shutter	NTSC - 1/60 ~ 1/100,000sec Auto PAL - 1/50 ~ 1/100,000sec Auto
S/N Ratio	More than 46dB (AGC Off)
Signal Process	Digital Signal Processor
White Balance	Automatic (2,100°K ~ 8,000°K)
Sensitivity	0.5 Lux / F 2.0
Gamma Correction	=0.45
Sync System	Internal
Video Output	Composite 1 [vp-p] 75(Ohm) unbalanced
Sensitivity	1.0 Lux / F 2.0
Sync System	Internal
Video Output	Composite 1 [vp-p] 75(Ohm) unbalanced
Power Supply	DC12V (±10%)
Operating Temperature	-10°C ~ +50°C
Storage Temperature	-20°C ~ 60°C
Dimensions	23mm (dia)

- 1/3" Sony CCD / 380 TV Lines
- 0.5 Lux @ F2.0
- Water Resistant(IP 67) (KPC-S230CWX Model Only)

Lens Options

- KPC-S230CB f2.45 / 2.97 / 3.6 / 6 / 8 / 12mm Board Lens
- KPC-S230CP1 f3.7mm Cone Pinhole Lens
- KPC-S230CP3 f3.7mm Flat Pinhole Lens
- KPC-S230P4 f4.3mm Super Cone Pinhole Lens
- KPC-S230CV f4~8mm Varifocal Manual
- KPC-S230CWX f2.97 / 3.6 / 6 mm Board Lens
- All models are able to be installed with Ex-view CCD

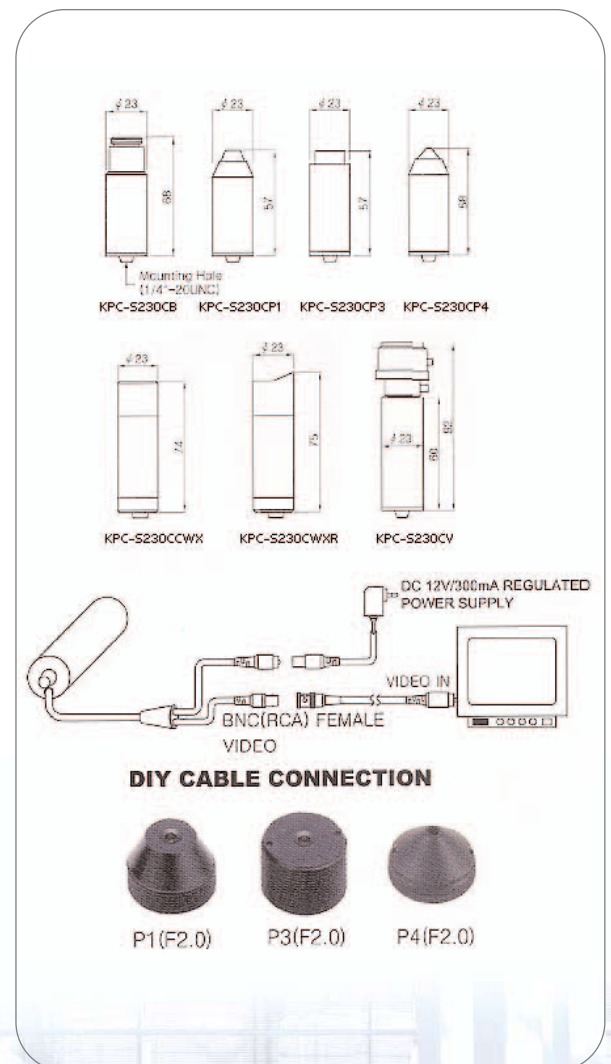

Digital CCTV Limited
The Old School, Woughton Park, Milton Keynes
MK6 3AP UK 01908 239239 sales@digitalcctv.com